


 **FERRIS**[®]

2026 PRODUCT LINEUP



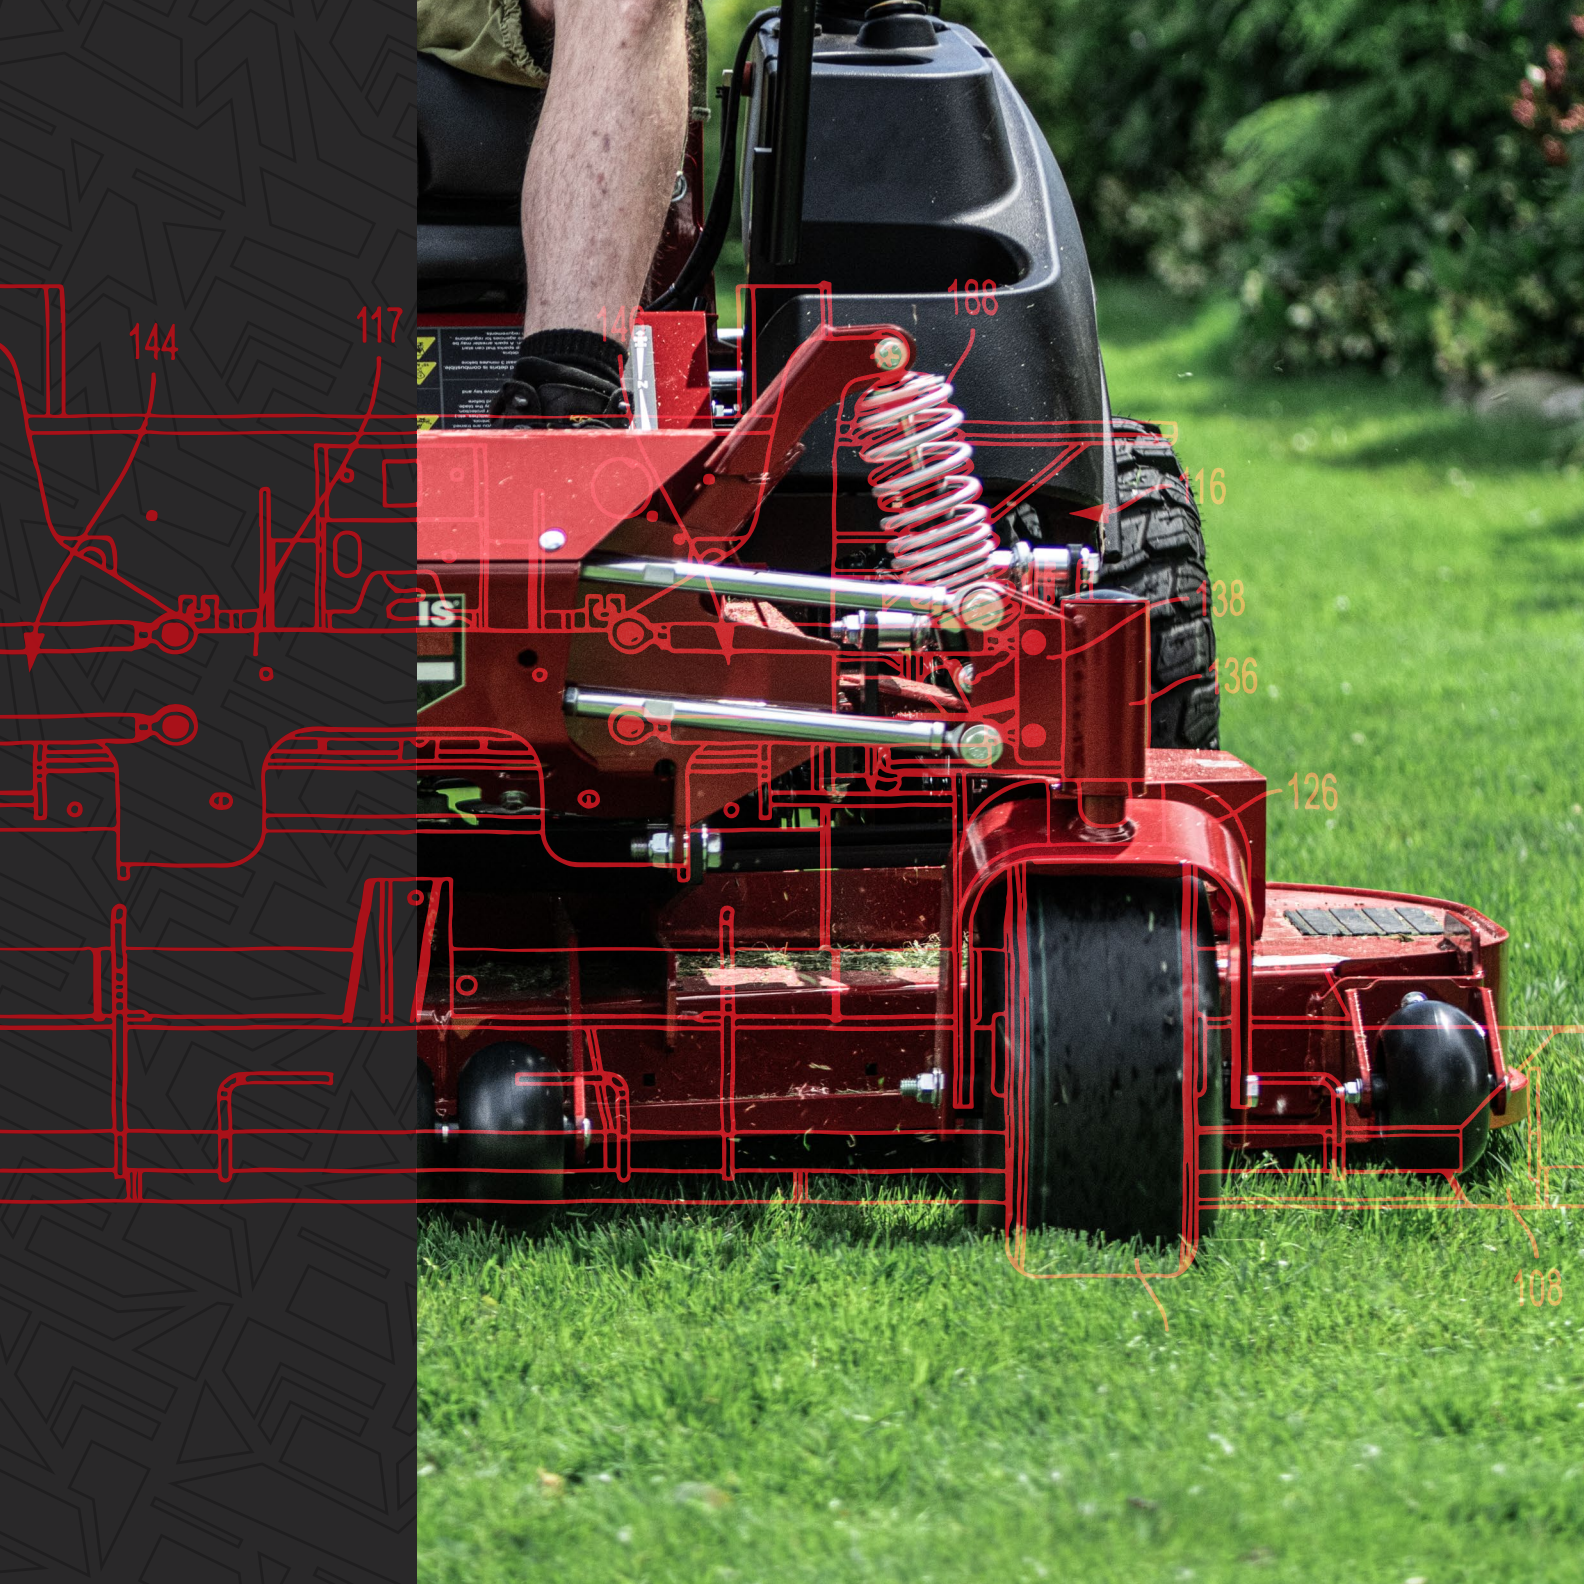

144

117

145

188

166

138

136

126

108

OVER 20 YEARS AGO, Ferris set the bar as the first and

only manufacturer to integrate suspension into the mowing experience

With auto racing in our DNA, we understood the positive impact suspension

had on speed and control, so we applied it to our mowers. In fact, we first

patented our suspension system with Todd Gordon, who went on to be a

winning NASCAR crew chief. We revolutionized the commercial cutting

landscape and continue to raise the bar with industry-leading suspension.

Our racing-inspired, automotive-style suspension and integrated cutting

decks are engineered to deliver a quality cut faster, allowing you to

earn profits and bragging rights. Our suspension is not just a feature

or a marketing gimmick, it is a game changer that simply has to be

experienced. Others have tried, but there's a difference you can feel only

on a Ferris. True suspension changes everything.

EXPERIENCE SUSPENSION.



CONTENTS

FERRIS LINEUP	04
WARRANTY INFO	07
WHAT'S NEW	09
STAND-ONS	11
ZERO TURNS	15
WALK BEHINDS	25
COLLECTION SYSTEMS	26
ACCESSORIES	27
BLOWERS	29
SPREADER/SPRAYERS	31

ZERO TURNS



F60

F SERIES



300R

R SERIES



300S

S SERIES



500S



IS 600

IS® SERIES



IS 700



IS 2600

DIESEL IS® SERIES



IS 6200



ISX 800



ISX 2200



ISX 3300

ISX™ SERIES

STAND ONS



SRS Z1



SRS Z2



SRS Z3X

SRS™ SERIES

FRONT MOUNTS



PROCUT™ S

PROCUT SERIES

WALK BEHINDS



FW15



FW25



FW45

FW SERIES

BLOWERS



FB1000



FB2000



FB3000

FB SERIES

SPREADER/SPRAYERS



ROVER™



PATHFINDER™



VENTURE™ X

FS SERIES

INTRODUCING OUR **10** YEAR **SUSPENSION** WARRANTY

PROOF THAT IT'S BUILT TO LAST.

FERRIS HAS SPENT OVER THREE DECADES ENGINEERING AND REFINING OUR INDUSTRY LEADING PATENTED SUSPENSION SYSTEMS, OPTIMIZING FOR REAL-WORLD MOWING CONDITIONS. OUR SUSPENSION SYSTEMS IMPROVE COMFORT, STABILITY, TRACTION AND PRODUCTIVITY. FROM OUR ICD™+ CUTTING DECK WITH FRONT AND REAR DECK COMPENSATION SYSTEMS TO COMMERCIAL-GRADE COMPONENTS AND FULL CHASSIS DESIGN, FERRIS DELIVERS A COMPLETE SYSTEM.

FERRIS WARRANTY 2026

FERRIS LIMITED WARRANTY (EFFECTIVE NOVEMBER 1, 2026)

Ferris warrants to the original purchaser that its equipment will be free from defects in materials and workmanship under normal use and service. This warranty is limited to the periods stated below, beginning on the date of retail purchase.

PRODUCT	WARRANTY DURATION
300R ¹ , 300S ¹ , and 500S ¹	3 Years
IS600 ³ , IS700 ³ , ProCut S ³	2 years unlimited hours or 4 years / 500 hours*
ISX800 ³ , ISX2200 ³ , ISX3300 ³ , IS2600 ³ , IS6200 ³	2 years unlimited hours or 4 years / 500 hours*
SRS Z1 ³ , Z2 ³ , Z3 ³	2 years unlimited hours or 4 years / 500 hours*
FW15 ³ , FW25 ³ , FW35 ³ , & FW45 ³	2 years unlimited hours
Suspension System (Frame Components) ²	10 Years

EXCLUSIONS AND LIMITATIONS

ITEM	COVERAGE
Hydro Belts, Tires, Battery, Blades	90 Days parts and labor
Mower Deck Drive Belt (Single-Belt Systems)	1 Year or 100 Hours*
Mower Deck Drive Belt (Two-Belt Systems)	3 Years or 300 Hours* Year 1: Parts & Labor Years 2-3: Parts Only
Attachments	1 Year
Engine	See Engine Operator's Manual

¹ 90-day commercial

² 10-year frame suspension warranty

- This suspension warranty protects against defects in material or workmanship.
- All suspension components and labor charges for the repair or replacement of defective parts are covered.
- The warranty begins on the date of purchase by the original retail purchaser, it is not transferable.
- This warranty excludes failures due to wear, improper or lack of maintenance, abuse, equipment modifications and corrosion, discoloration or rusting caused by environmental conditions.

³ 90-day Warranty for Rental Use

* Whichever occurs first



WHAT'S **NEW!**

NEW POWER OPTIONS

Performance and efficiency are built in to our newly added higher horsepower engine options for Ferris® stand-on units.

30.5 HP Kawasaki® FX781V EVO engine (Z2, 60" Deck)

38.5 HP Kawasaki FX1000V EFI engine (Z3X, 52" & 60" Deck)

40HP Vanguard® BIG BLOCK™ EFI-ETC engine,
with OIL GUARD™ technology (Z3X, 52", 60", & 72" Deck)





CITY OF
SHERRILL

STAND ONS



SRS Z1

36"-48" Deck | 19.0-23.0 HP

Vanguard®
Kawasaki® FX600V
Kawasaki FX691V



SRS Z2

52"-60" Deck | 25.5-30.5 HP

Vanguard 810 EFI
Kawasaki FX801V
Kawasaki FX781V EVO



SRS Z3X

52"-72" Deck | 27.0-40.0 HP

Vanguard BIG BLOCK EFI-ETC
Kawasaki FX1000 EFI
Kawasaki FX850V

“

Our experience with the Ferris brand and working with the dealership, for us all it took was getting on a machine and testing it out in our own environment. When we could do that, we saw this is a good fit. It's a game changer for our team.

– David Landscape
Company Manager

”



STAND ON SERIES

Expanding on our zero turn lineup of commercial lawn mowers, the Soft Ride Stand-on (SRST™) Series of stand-on mowers delivers the kind of heightened productivity that has become synonymous with the Ferris brand, in a stand-on machine. Precision-engineered for superior maneuverability and balanced stability and traction, the ergonomically designed SRS Z1, Z2, and Z3X mowers are loaded with innovative features that live up to Ferris' unwavering commitment to helping you work faster, take on more jobs, and finish the day feeling good.



SRS Z1



SRS Z2



SRS Z3X

MODEL	ENGINE OPTIONS	DECK
5901939	Kawasaki® FX600V (19 hp**/603 cc)	36"
5901941	Vanguard® (23 hp*/627 cc)	36"
5901940	Kawasaki® FX691V (22 hp**/726 cc)	48" iCD
5901942	Vanguard® (23 hp*/627 cc)	48" iCD

MODEL	ENGINE OPTIONS	DECK
5902164	Kawasaki® FX801V (25.5 hp**/852 cc)	52" iCD+
5902165	Vanguard® 810 EFI with Oil Guard™ (28 hp*/810 cc)	52" iCD+
5902235	Kawasaki® FX781V EVO (30.5 hp**/822 cc)	52" iCD+
5902070	Vanguard® 810 EFI with Oil Guard™ (28 hp*/810 cc)	60" iCD+
5902236	Kawasaki® FX781V EVO (30.5 hp**/822 cc)	60" iCD+

MODEL	ENGINE OPTIONS	DECK
5902168	Kawasaki® FX850V (27 hp**/852 cc)	52" iCD+
5902233	Kawasaki® FX1000V EFI (38.5 hp**/999 cc)	52" iCD+
5902217	Vanguard® BIG BLOCK™ EFI-ETC with Oil Guard™ (40 hp*/993 cc)	52" iCD+
5902234	Kawasaki® FX1000V EFI (38.5 hp**/999 cc)	60" iCD+
5902216	Vanguard® BIG BLOCK™ EFI-ETC with Oil Guard™ (40 hp*/993 cc)	60" iCD+
5902215	Vanguard® BIG BLOCK™ EFI-ETC with Oil Guard™ (40 hp*/993 cc)	72" iCD+

	POWER RATING (HP)	PTO	DISPLACEMENT (CC)	CYLINDERS	STARTER	OIL GUARD™ SYSTEM	OIL XTEND™ SYSTEM	FUEL TANK CAPACITY (GAL)	SUSPENSION	TRANSMISSION	DRIVE AXLES (IN)	DRIVE TIRES (IN)	CASTER TIRES (IN)	SPEEDS FWD (MPH)	SPEEDS REV (MPH)
SRS Z1	19 - 23	Electric	603 - 726	2	Electric	N/A	N/A	6	Adjustable coil-over shock; Operator Suspension Platform	Dual commercial Hydro-Gear® ZT-3400® transaxles with 7" cooling fans	1.125	23 x 8.5 -12 or 23 x 10.5 - 12	11 x 4 - 5 Flat-free	0 - 8	0 - 4
SRS Z2	25.5 - 28	Electric	810 - 852	2	Electric	Standard on some	N/A	8		Dual commercial Hydro-Gear® ZT-3800™ transaxles with 7" cooling fans and oil coolers	1.125	23 x 10.5 - 12	13 x 5 - 6 Flat-free	0 - 10	0 - 5
SRS Z3X	27 - 37	Electric	852 - 993	2	Electric	Standard on some	N/A	11		Dual commercial Hydro-Gear® ZT-4400™ transaxles with 8" cooling fans	1.375	24 x 9.5 - 12 or 24 X 12-12	13 x 6.5 - 6 Flat-free	0 - 12	0 - 5

	CUTTING WIDTH (IN)	CUTTING HEIGHT (IN)	SPINDLES	DECK CONSTRUCTION	OVERALL LENGTH (IN)	OVERALL WIDTH (IN) DEFLECTOR DOWN	OVERALL WIDTH (IN) DEFLECTOR UP	DRY WEIGHT (LBS)	SEAT PACKAGE	INSTRUMENTATION	ROPS	CONTROLS / SAFETY GROUP	PARKING BRAKE / SAFETY CIRCUIT
SRS Z1	36 - 48	1.75 - 4.5	Aluminum greaseable	Fabricated 10-gauge or iCD™ Cutting	65	49 - 59.5	42 - 54	813 - 866	N/A	Dual-function hour meter, fuel level gauge	N/A	Operator presence in platform, parking brake safety circuit for starting engine, automatic PTO restart	Hand-operated internal transaxle brake
SRS Z2	52 - 60	1.75 - 5	Cast-iron	iCD™+ Cutting System	67 - 72.75	65 - 74	54.75 - 65	938 - 1051	N/A		N/A		
SRS Z3X	56 - 72	1.75 - 5	Cast-iron greaseable	iCD™+ Cutting System	69 - 74.5	65 - 85.25	54.5 - 77	1184 - 1327	N/A		N/A		

2 YEAR NO HOUR LIMIT OR 4 YEAR/500 HOURS WARRANTY† + 10-YEAR SUSPENSION WARRANTY† + 3-YEAR LIMITED BELT WARRANTY†

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton. ** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

† See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.



ZERO TURNS



F60

36" Deck | 19.0 HP
Kawasaki® FX600V



300R

42" Deck | 21.5-23.0 HP
Briggs & Stratton® PXi Series
Kawasaki FR651



300S

48"-52" Deck | 21.5-25.0 HP
Briggs & Stratton PXi Series
Kawasaki FR651



500S

48"-61" Deck | 24.0-25.0 HP
Briggs & Stratton CXi Series
Kawasaki FR730V



IS 600

48"-52" Deck | 18.5-25.0 HP
Briggs & Stratton CXi Series
Kawasaki FS600V
Kawasaki FS691V



IS 700

52"-60" Deck | 27.0 HP
Briggs & Stratton CXi Series



ISX 800

52"-60" Deck | 24.0-27.0 HP
Briggs & Stratton CXi Series
Briggs & Stratton CXi EFI-ETC
w/ oil Xtend™
Kawasaki FT730V



ISX 2200

52"-60" Deck | 28.0-30.5 HP
Vanguard BIG BLOCK 810 EFI
Kawasaki FX781V EVO



ISX 3300

60"-72" Deck | 38.5-40.0 HP
Vanguard BIG BLOCK 810 EFI-ETC
Kawasaki FX1000V EFI



IS 2600

61" Deck | 23.0 HP
Yanmar® Diesel



IS 6200

72" Deck | 48.0 HP
CAT® Turbo Diesel

“

The mower as a whole is smoother. The engine runs smooth, it has a wider wheelbase that grips hills and slopes better than our previous mower. That's what separates Ferris from every other manufacturer in this industry is ride comfort.

– Epic Lawn Care, KY

”



ISX™ SERIES

Our leadership in suspension technology excels in the industry-leading ForeFront Suspension System. Delivering a premium, cushioned ride that drastically reduces shock to your body, as well as the mower, and enables you to mow faster and get done quicker than ever before. Be in control of your productivity and comfort, without sacrificing cut quality with the Ferris ISX Series.



ISX 800



ISX 2200



ISX 3300

MODEL	ENGINE OPTIONS	DECK
5902155	Kawasaki® FT730V (24 hp**/726 cc)	52" iCD+
5902154	Briggs & Stratton® CXi Series (27 hp/810 cc)	52" iCD+
5902073	Kawasaki® FT730V (24 hp**/726 cc)	60" iCD+
5902074	Kawasaki® FT730V-EFI (26 hp**/726 cc)	60" iCD+
5902075	Briggs & Stratton® CXi Series (27 hp/810 cc)	60" iCD+
5902172	Briggs & Stratton® CXi Series EFI-ETC w/ Oil Xtend™ (27 hp*/810 cc)	60" iCD+

MODEL	ENGINE OPTIONS	DECK
5902159	Kawasaki® FX781V EVO (30.5** hp/822 cc)	52" iCD+
5902157	Vanguard® 810cc EFI with Oil Guard™ (28* hp/810 cc)	52" iCD+
5902180	Kawasaki® FX781V EVO (30.5** hp/822 cc)	60" iCD+
5902078	Vanguard® 810cc EFI with Oil Guard™ (28* hp/810 cc)	60" iCD+

MODEL	ENGINE OPTIONS	DECK
5902065	Kawasaki® FX1000V EFI (38.5 hp**/999 cc)	60" iCD+
5902064	Vanguard® BIG BLOCK™ EFI-ETC with Oil Guard™ (40 hp*/993 cc)	60" iCD+
5902160	Kawasaki® FX1000V EFI (38.5 hp**/999 cc)	72" iCD+
5902145	Vanguard® BIG BLOCK™ EFI-ETC with Oil Guard™ (40 hp*/993 cc)	72" iCD+

	POWER RATING (HP)	PTO	DISPLACEMENT (CC)	CYLINDERS	STARTER	OIL GUARD™ SYSTEM	OIL XTEND™ SYSTEM	FUEL TANK CAPACITY (GAL)	SUSPENSION	TRANSMISSION	DRIVE AXLES (IN)	DRIVE TIRES (IN)	CASTER TIRES (IN)	SPEEDS FWD (MPH)	SPEEDS REV (MPH)
ISX 800	24 - 27	Electric	726 - 810	2	Electric	N/A	Standard on 5902172	5.5	ForeFront™ Suspension System - Front independent with four cast-iron control rods paired with medium size adjustable coil-over shocks and a rear swing-arm with large adjustable coil-over shocks	Dual commercial Hydro-Gear® ZT-3400® transaxles with 7" cooling fans	1.125	23 x 10.5 - 12	13 x 6.5 - 6	0 - 10	0 - 5
ISX 2200	28 - 30.5	Electric	810 - 822	2	Electric	Standard on some	N/A	11		Dual commercial Hydro-Gear® ZT-4400™ transaxles with 8.3" cooling fans	1.375	24 x 9.5 - 12 or 24 x 12 - 12	13 x 6.5 - 6	0 - 10	0 - 5
ISX 3300	38.5 - 40	Electric	993 - 999	2	Electric	Standard on some	N/A	11		Dual commercial Hydro-Gear® ZT-5400 Powertrain® transaxles with 9" cooling fans	1.375	26 x 12 - 12	13 x 6.5 - 6 some Flat-Free	0 - 12	0 - 5

	CUTTING WIDTH (IN)	CUTTING HEIGHT (IN)	SPINDLES	DECK CONSTRUCTION	OVERALL LENGTH (IN)	OVERALL WIDTH (IN) DEFLECTOR DOWN	OVERALL WIDTH (IN) DEFLECTOR UP	DRY WEIGHT (LBS)	SEAT PACKAGE	INSTRUMENTATION	ROPS	CONTROLS / SAFETY GROUP	PARKING BRAKE / SAFETY CIRCUIT
ISX 800	52 - 60	1.5 - 5	Aluminum greaseable	iCD™+ Cutting System, 2-belt	81	65 - 74	57 - 65	1206 - 1268	Premium mid-back suspension seat with adjustable arm rests	Dual-function hour meter, fuel level gauge in tank	180° foldable	Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit/adjustable twin steering controls	Hand-operated internal transaxle brake
ISX 2200	52 - 60	1.5 - 5	Cast-iron greaseable	iCD™+ Cutting System, 2-belt	82.5	67 - 74	57 - 65	1232 - 1405	Premium high-back suspension seat w/ adjustable arm rest and lumbar & back recline		180° foldable		
ISX 3300	60 - 72	1.5 - 5	Hercules™ II Cast-iron greaseable	iCD™+ Cutting System, 2-belt	84.5	74 - 86	65 - 74	1496 - 1717			158° foldable		

2 YEAR NO HOUR LIMIT OR 4 YEAR/500 HOURS WARRANTY† + 10-YEAR SUSPENSION WARRANTY† + 3-YEAR LIMITED BELT WARRANTY†

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton. ** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki. † See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.

“

The smoothest and most efficient mower I have owned in my 17 years in the lawn care industry!

– Maverick Lawn Care, MN

”



DIESEL IS[®] SERIES

Step up to the diesel IS Series for exceptional performance in an industry-leading package. With powerful engine options from CAT[®] and Yanmar[®] there is a reliable diesel solution to answer any challenge. Plus, while they pack a punch for performance, they don't sacrifice comfort with their patented 4-point suspension system, which delivers a comfortable, sustainable ride for less downtime.



IS 2600



IS 6200



MODEL	ENGINE OPTIONS	DECK
5901929	Yanmar [®] Diesel (23 hp/904 cc)	61" iCD

MODEL	ENGINE OPTIONS	DECK
5902162	CAT [®] Turbo Diesel (48 hp ^{**} /1700 cc)	72" iCD+

	POWER RATING (HP)	PTO	DISPLACEMENT (CC)	CYLINDERS	STARTER	OIL GUARD [™] SYSTEM	OIL XTEND [™] SYSTEM	FUEL TANK CAPACITY (GAL)	SUSPENSION	TRANSMISSION	DRIVE AXLES (IN)	DRIVE TIRES (IN)	CASTER TIRES (IN)	SPEEDS FWD (MPH)	SPEEDS REV (MPH)
IS 2600	23	Electric	904	3	Electric	N/A	N/A	11	Independent front control arms with large adjustable coil-over shocks and a rear swing-arm with large adjustable coil-over shocks	Dual commercial Hydro-Gear [®] ZT-4400 [™] transaxles with 8.3" cooling fans	1.375	24 x 12 - 12	13 x 6.5 - 6	0 - 10	0 - 6
IS 6200	48	Electric	1700	3	Electric	N/A	N/A	15							

	CUTTING WIDTH (IN)	CUTTING HEIGHT (IN)	SPINDLES	DECK CONSTRUCTION	OVERALL LENGTH (IN)	OVERALL WIDTH (IN) DEFLECTOR DOWN	OVERALL WIDTH (IN) DEFLECTOR UP	DRY WEIGHT (LBS)	SEAT PACKAGE	INSTRUMENTATION	ROPS	CONTROLS / SAFETY GROUP	PARKING BRAKE / SAFETY CIRCUIT
IS 2600	61	1.75 - 5	Cast-iron greaseable	iCD [™] Cutting System	86.25	76.75	63.5	1606	Premium mid-back suspension seat with adjustable arm rests	Dual-function hour meter, fuel level gauge in each tank	180° foldable	Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit/adjustable twin steering controls	Hand operated internal transaxle brake
IS 6200	72	1.5 - 6	Hercules [™] II Cast-iron greaseable	iCD [™] + Cutting System, 2-belt	89.66	86	74	2518	Premium high-back suspension seat w/ adjustable arm rest and lumbar & back recline	Digital display	105° foldable	Hand-operated external drum type	

2 YEAR NO HOUR LIMIT OR 4 YEAR/500 HOURS WARRANTY[†] + 10-YEAR SUSPENSION WARRANTY[†] + 3-YEAR LIMITED BELT WARRANTY[†]

^{*} Power rated by engine manufacturer. ^{**} Power is rated for 48 gross horsepower at 2800 rpm as rated by CAT. [†] See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.

IS[®] SERIES

End the day feeling good with the IS Series commercially-inspired mowers featuring patented suspension technology and powerful engine options. Whether you run a fleet or are an owner-operator there is a unique solution for you.



IS 600



IS 700

MODEL	ENGINE OPTIONS	DECK
5901908	Kawasaki® FS600V (18.5 hp**/603 cc)	48"
5902110	Briggs & Stratton® CXi Series (25 hp*/724 cc)	48"
5901911	Kawasaki® FS691V (23 hp**/726 cc)	52"
5902109	Briggs & Stratton® CXi Series (25 hp*/724 cc)	52"

MODEL	ENGINE OPTIONS	DECK
5902107	Briggs & Stratton® CXi Series (27 hp*/810 cc)	52" iCD
5902061	Briggs & Stratton® CXi Series (27 hp*/810 cc)	60" iCD

	POWER RATING (HP)	PTO	DISPLACEMENT (CC)	CYLINDERS	STARTER	OIL GUARD™ SYSTEM	OIL XTEND™ SYSTEM	FUEL TANK CAPACITY (GAL)	SUSPENSION	TRANSMISSION	DRIVE AXLES (IN)	CASTER TIRES (IN)	DRIVE TIRES (IN)	SPEEDS FWD (MPH)	SPEEDS REV (MPH)
IS 600	18.5 - 25	Electric	603 - 724	2	Electric	N/A	N/A	5.5	Adjustable front and rear coil-over shocks with pivoting front axle and a rear swing-arm with large adjustable coil-over shocks	Dual commercial Hydro-Gear® ZT-3200™ transaxles with 7° cooling fans	1.125	13 x 6.5 - 6	22 x 11 - 10	0 - 10	0 - 5
IS 700	27	Electric	810	2	Electric	N/A	N/A	5.5			1.125	13 x 6.5 - 6	22 x 11 - 10	0 - 10	0 - 5

	CUTTING WIDTH (IN)	CUTTING HEIGHT (IN)	SPINDLES	DECK CONSTRUCTION	OVERALL LENGTH (IN)	OVERALL WIDTH (IN) DEFLECTOR DOWN	OVERALL WIDTH (IN) DEFLECTOR UP	DRY WEIGHT (LBS)	SEAT PACKAGE	INSTRUMENTATION	ROPS	CONTROLS / SAFETY GROUP	PARKING BRAKE / SAFETY CIRCUIT
IS 600	48 - 52	1.4 - 4.5	Aluminum with 1" steel shafts and sealed ball bearings	Fabricated 10-gauge	80	63 - 65	51 - 57	942 - 964	20" Premium w/ slide rail and armrests	Dual-function hour meter, fuel level gauge in each tank	180° foldable	Adjustable twin fold out 1" tubular steering levers with comfort grip	Hand-operated internal transaxle brake
IS 700	52 - 60	1.5 - 5		iCD™ Cutting System	81	65 - 74	57 - 65	1059 - 1140	Mid-back suspension seat with adjustable arm rests		180° foldable		

2 YEAR NO HOUR LIMIT OR 4 YEAR/500 HOURS WARRANTY[†] + 10-YEAR SUSPENSION WARRANTY[†] + 3-YEAR LIMITED BELT WARRANTY[†]

F SERIES

The F Series pairs essential commercial-grade components with a compact, sturdy frame to allow for easy maneuverability in tight spaces.



F60

MODEL	ENGINE OPTIONS	DECK
5901895	Kawasaki® FX600V (19 hp**/603cc)	36" Fabricated

POWER RATING (HP)	PTO	DISPLACEMENT (CC)	CYLINDERS	STARTER	OIL GUARD™ SYSTEM	OIL XTEND™ SYSTEM	FUEL TANK CAPACITY (GAL)	CUTTING WIDTH (IN)	CUTTING HEIGHT (IN)	SPINDLES	DECK CONSTRUCTION
19	Electric	603	2	Electric	N/A	N/A	8	36	1.5 - 4.5	Aluminum greaseable	Fabricated 10-gauge
SUSPENSION	TRANSMISSION						DRIVE AXLES (IN)	DRIVE TIRES (IN)	CASTER TIRES (IN)	SPEEDS FWD (MPH)	SPEEDS REV (MPH)
N/A	Dual commercial Hydro-Gear® ZT-3100® transaxles with 7" cooling fans						1	20 x 7 - 10	11 x 4 - 5, Flat-free	0 - 7	0 - 4
OVERALL LENGTH (IN)	OVERALL WIDTH (IN) DEFLECTOR DOWN	OVERALL WIDTH (IN) DEFLECTOR UP	DRY WEIGHT (LBS)	SEAT PACKAGE	INSTRUMENTATION		ROPS	CONTROLS / SAFETY GROUP		PARKING BRAKE / SAFETY CIRCUIT	
73.75	49.5	40.5	732	18" Premium Seats w/ armrests	Fuel level gauge in each tank, dual-function hour meter		N/A	Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit, adjustable twin steering controls		Hand-operated internal transaxle brake	

4-YEAR OR 500 HOURS LIMITED WARRANTY¹

** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.

¹ See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.



R & S SERIES

The 300 series delivers power in a compact size. Designed for smaller lot lines or maneuvering around intricate landscaping, with suspension for a smooth operation.



300R

MODEL	ENGINE OPTIONS	DECK
5902204	Briggs & Stratton® PXi Series (23 hp*/724 cc)	42"
5902205	Kawasaki® FR651V (21.5 hp**/726 cc)	42"



300S

MODEL	ENGINE OPTIONS	DECK
5902211	Briggs & Stratton® PXi Series (23 hp*/724 cc)	48"
5902206	Kawasaki® FR651 Series (21.5 hp**/726cc)	48"
5902212	Briggs & Stratton® PXi Series (25 hp*/724 cc)	52"
5902207	Kawasaki® FR651 Series (21.5 hp**/726cc)	52"



500S

MODEL	ENGINE OPTIONS	DECK
5902101	Briggs & Stratton® CXi Series (25 hp*/724 cc)	48"
5902102	Briggs & Stratton® CXi Series (25 hp*/724 cc)	52"
5902056	Kawasaki® FR730V (24 hp**/726 cc)	61"
5902103	Briggs & Stratton® CXi Series (25 hp*/724 cc)	61"

	POWER RATING (HP)	PTO	DISPLACEMENT (CC)	CYLINDERS	STARTER	OIL GUARD™ SYSTEM	OIL XTEND™ SYSTEM	FUEL TANK CAPACITY (GAL)	SUSPENSION	TRANSMISSION	DRIVE AXLES (IN)	CASTER TIRES (IN)	DRIVE TIRES (IN)	SPEEDS FWD (MPH)	SPEEDS REV (MPH)
300R	21.5 - 23	Electric	724 - 726	2	Electric	N/A	N/A	3	N/A	Dual Hydro-Gear® ZT-2800® transaxles with 7" cooling fans	1	11 x 6 - 5	20 x 8 - 8	0 - 8	0 - 8
300S	21.5 - 25	Electric	724 - 726	2	Electric	N/A	N/A	3	Front and rear adjustable dual coil-over shocks		1	11 x 6 - 5	20 x 10 - 10	0 - 8	0 - 4
500S	24 - 25	Electric	724 - 726	2	Electric	N/A	N/A	3	Front and rear adjustable dual coil-over shocks	Dual Hydro-Gear® ZT-2800® or 3100® transaxles with 7" cooling fans or	1	13 x 6.5 - 6	22 x 10 - 10 or 22 x 11 - 10	0 - 8.5	0 - 4

	CUTTING WIDTH (IN)	CUTTING HEIGHT (IN)	SPINDLES	DECK CONSTRUCTION	OVERALL LENGTH (IN)	OVERALL WIDTH (IN) DEFLECTOR DOWN	OVERALL WIDTH (IN) DEFLECTOR UP	DRY WEIGHT (LBS)	SEAT PACKAGE	INSTRUMENTATION	ROPS	CONTROLS / SAFETY GROUP	PARKING BRAKE / SAFETY CIRCUIT
300R	42	1.5 - 4.5	Aluminum with double-lip sealed ball bearings	Fabricated 12-gauge	73.5	55	44	544 - 556	18" Premium w/ under seat spring suspension, without armrests	Hour meter, fuel level gauge in tank	N/A	Seat activated engine kill, clutch safety switch, neutral and parking brake safety circuit, adjustable twin steering controls	Integrated into steering levers
300S	48 - 52	1.5 - 4.5		Fabricated 10-gauge	72.5	59 - 64	49 - 53	643 - 700			N/A		
500S	48 - 61	1.5 - 4.5		Fabricated 10-gauge	78.5 - 80	53 - 74	N/A	757 - 832	20" Premium w/ slide rails and under seat spring suspension		N/A	Adjustable twin fold out 1" tubular steering levers with comfort grip	

3-YEAR CONSUMER | 90-DAY COMMERCIAL¹ WARRANTY

PRO CUT S SERIES

Getting under low branches and along fencing is quick work for the front-mounted deck of the ProCut™ S. Easy to use and service, the ProCut S has high visibility.



MODEL	ENGINE OPTIONS	DECK
5900533 w/ 5900632	Kawasaki® FS730V (24 hp**/726 cc)	61"
5902106 w/ 5900632	Briggs & Stratton® CXi Series (27 hp*/810 cc)	61"

POWER RATING (HP)	PTO	DISPLACEMENT (CC)	CYLINDERS	STARTER	OIL GUARD™ SYSTEM	OIL XTEND™ SYSTEM	FUEL TANK CAPACITY (GAL)	CUTTING WIDTH (IN)	CUTTING HEIGHT (IN)	SPINDLES	DECK CONSTRUCTION				
24 - 27	Electric	726 - 810	2	Electric	N/A	N/A	5.5	61	1.5 - 5	Aluminum greaseable	Fabricated 10-gauge				
SUSPENSION	TRANSMISSION	DRIVE AXLES (IN)	CASTER TIRES (IN)	DRIVE TIRES (IN)	SPEEDS FWD (MPH)	SPEEDS REV (MPH)	OVERALL LENGTH (IN)	OVERALL WIDTH (IN) DEFLECTOR DOWN	OVERALL WIDTH (IN) DEFLECTOR UP	DRY WEIGHT (LBS)	SEAT PACKAGE	INSTRUMENTATION	ROPS	CONTROLS / SAFETY GROUP	PARKING BRAKE / SAFETY CIRCUIT
Rear wheel with adjustable coil-over shock	Hydro pump and wheel motors with 7" cooling fans	1.25	22 x 10 - 10	18 x 7.5 (steering); 11 x 4 (front)	0 - 8	0 - 4	115	73	61.5	1100	Premium mid-back seat with adjustable arm rests	Hour meter	N/A	Single foot pedal speed control, foot-actuated operator presence, blade/clutch safety switch/yoke steering control	Drum

2 YEAR NO HOUR LIMIT OR 4 YEAR/500 HOURS WARRANTY¹ + 10-YEAR SUSPENSION WARRANTY¹

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton. ** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki.
¹ See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.



“

The controls and wide stance allow you to mow places others would not even try.

- Emerald Lake Lawn, NH

”



FW SERIES

This isn't the mower you grew up pushing. Ferris Walk Behinds are meticulously built to help pros make quick work of trim and slope cutting. Ergonomic controls built around you and a variety of cutting widths make these mowers a valuable secret weapon for any crew. And, durable steel construction ensures they'll keep working hard, job after job.



FW 15



FW 25



FW 45

MODEL	ENGINE OPTIONS	DECK
5901737	Honda® GXV390 (10.2 hp / 389 cc)	32"

MODEL	ENGINE OPTIONS	DECK
5901886 CC™ Controls	Kawasaki® FS600V (18.5 hp** / 603 cc)	36"
5901887 Standard Controls	Kawasaki® FS600V (18.5 hp** / 603 cc)	48"
5901888 CC™ Controls	Kawasaki® FS600V (18.5 hp** / 603 cc)	48"

MODEL	ENGINE OPTIONS	DECK
5902014 CC™ Controls	Kawasaki® FX651V (20.5 hp** / 726 cc)	48"
5901891 Standard Controls	Kawasaki® FX651V (20.5 hp** / 726 cc)	52"
5902015 CC™ Controls	Kawasaki® FX651V (20.5 hp** / 726 cc)	52"
5901892 Standard Controls	Vanguard® 810cc EFI with Oil Guard™ (28 hp / 810 cc)	52"
5901893 CC™ Controls	Vanguard® 810cc EFI with Oil Guard™ (28 hp / 810 cc)	52"
5902016 CC™ Controls	Kawasaki® FX730V (23.5 hp** / 726 cc)	61"

	POWER RATING (HP)	PTO	DISPLACEMENT (CC)	CYLINDERS	STARTER	OIL GUARD™ SYSTEM	OIL XTEND™ SYSTEM	FUEL TANK CAPACITY (GAL)	SUSPENSION	TRANSMISSION	DRIVE AXLES (IN)	DRIVE TIRES (IN)	CASTER TIRES (IN)	SPEEDS FWD (MPH)	SPEEDS REV (MPH)
FW 15	10.2	Manual, cable	389	1	Manual	N/A	N/A	0.55	None	Peerless axle with differential chain driven by Hydro-Gear® RT-310™ pump and motor	0.75	13 x 5 - 6	10.5 x 3 Caster wheel	0 - 4	0 - 2
FW 25	18.5	Electric	603	2	Electric	N/A	N/A	5	None	Dual commercial Hydro-Gear® ZT-3100® transaxles with 7" mounted cooling fans	1	20 x 7 - 10	9 x 3.5 - 4 Flat-free	0 - 6	0 - 3
FW 45	20.5 - 28	Electric	726 - 810	2	Electric	Standard on some	N/A	5	None	Dual commercial Hydro-Gear® ZT-3400® transaxles with 7" cooling fans with oil coolers	1	20 x 7 - 10 or 20 x 8 - 10	11 x 4 - 5 Flat-free	0 - 7	0 - 3

	CUTTING WIDTH (IN)	CUTTING HEIGHT (IN)	SPINDLES	DECK CONSTRUCTION	OVERALL LENGTH (IN)	OVERALL WIDTH (IN) DEFLECTOR DOWN	OVERALL WIDTH (IN) DEFLECTOR UP	DRY WEIGHT (LBS)	SEAT PACKAGE	INSTRUMENTATION	ROPS	PARKING BRAKE / SAFETY CIRCUIT
FW 15	32	1.5 - 5	Aluminum greaseable	Fabricated 14 and 12-gauge	73.5	44	32.5	285	N/A	Speed indicator	N/A	Blade control bail OPC N/A
FW 25	36 - 48	1.5 - 4.5	Aluminum greaseable	Fabricated 10-gauge	73 - 78	48.5 - 59.75	40.75 - 52.5	632 - 694	N/A	Dual-function hour meter	N/A	Hand-operated internal transaxle brake
FW 45	48 - 61	1.5 - 5	Cast-iron greaseable	Fabricated 10-gauge	75 - 78.75	62.5 - 76.5	49.5 - 65	809 - 888	N/A	Dual-function hour meter, speed indicator	N/A	Hand-operated internal transaxle brake

2-YEAR LIMITED WARRANTY¹

¹ Power rated by engine manufacturer. * Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton. ** All power levels are stated gross horsepower per SAE J2723 as rated by Kawasaki. ² See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.

COLLECTION SYSTEMS

TURBO-PRO™ SYSTEM

The TURBO-Pro System is a lightweight blower assembly ideal for use with compact models in all cutting conditions throughout the entire season.



Generous 6" diameter outlet hose



Durable composite impeller housing with reinforced metal plate for high contact debris areas

Heavy-duty oversized drive & idler pulleys combined with long drive belt allow for cool running and maximum belt life



Curved steel blade impeller reduces noise. After initial installation, the **quick attach design** can be mounted or removed with no tools in a few minutes

TURBO-Pro Blower*

Width: 19"
Weight: 56 lbs
Impeller fin: 2"

TURBO-PRO™ MAX SYSTEM

This go-to system for landscapers acts as a lawn vacuum for a clean finish. It quickly mounts to the deck with tool-less stainless steel hardware. It is ideal for use in all conditions found throughout the season.



Extra wide 7" diameter outlet hose

Twice the air flow vs. Turbo-Pro for increased capacity on larger decks cutting at higher speeds



Rugged steel impeller housing designed for extended life

Heavy-duty oversized drive & idler pulleys combined with long drive belt allow for cool running and maximum belt life



After initial installation, the **quick attach design** can be mounted or removed with no tools in a few minutes

TURBO-Pro Max Blower*

Width: 21"
Weight: 62 lbs
Impeller fin: 4"

COMPATIBILITY

TURBO-PRO

CLEAN SWEEP TWIN

The twin bag system is easy to install and features durable materials for reliable debris cleanup. Capacity: 8 cu. ft.



500S

52" / 61"

2-BAG HARD TOP

The double bag collection system is simple to install. Each heavy-duty mesh bag has a rugged polyethylene underside with integrated handle to assist with removal. Capacity: 10 cu. ft.



N/A

3-BAG HARD TOP

Innovative molded hard top design allows for increased capacity. Simple to install. Each heavy-duty mesh bag has an integrated handle to assist with removal. Capacity: 15 cu. ft.



N/A

IS 600

N/A

48" / 52"

N/A

IS 700

N/A

52" / 60"

N/A

ISX 800

N/A

52" / 52" iCD™+

52" / 52" iCD™+
& 60" iCD™+

TURBO-PRO MAX

2-BAG SOFT TOP

The double bag collection system is simple to install. Each heavy-duty mesh bag has a rugged polyethylene underside with integrated handle to assist with removal. Capacity: 9 cu. ft.



ISX 3300

N/A

3-BAG SOFT TOP

Simple to install. Each heavy-duty mesh bag has a rugged polyethylene underside with integrated handle to assist with removal. Capacity: 12.5 cu. ft.



60" iCD™+

ELECTRIC DFS

(Dump From Seat) Simply flip the switch on the control panel to release the hopper right from your seat. Capacity: 12.5 cu. ft.



60"

EZ DUMP™

(Dump From Seat) Simply pull up to release the hopper right from your seat. The hopper is specially lined to ensure that all material is dumped. Capacity: 12 cu. ft.



N/A

EZ DUMP XL™

(Dump From Seat) Ideal for larger jobs. Simply pull up to release the hopper right from your seat. The hopper is specially lined to ensure that all material is dumped. Capacity: 14 cu. ft.



60" iCD™+

ISX 2200

52" / 52" iCD™+

52" / 52" iCD™+
& 60" iCD™+

52" / 60"

52" / 52" iCD™+
& 60" iCD™+

N/A

ACCESSORIES



Fender Kit

Protects the engine from debris while also allowing for easy service access. Fits: ISX Series



Michelin® X® Tweel® Turf Airless Radial Tires*

(Select models and deck sizes)



Mulch Kit

Select kits include dedicated mulching blades, baffles, hardware and instruction sheet. Fits: all models.



Service Jack**

Heavy-duty steel bracket and jack allow for easy and convenient access to under the deck. Fits: all zero turn models.



ROPS LED Light Kit

Models are pre-wired for simple installation. (Select models)



LED Light Kits

Pre-wired kit and new kits with a wire harness for simple installation. (Select models)



Metal Grass Catcher

Rugged steel framed catcher has handles that make attaching & removing a breeze. Capacity: 4.3 bushels. (Select models)



Fabric Grass Catcher

Durable, fabric bag with hard plastic bottom; attaches quickly. Capacity: 2.5 bushels. (Select models)



Trailer Hitch Kit

Will accept a 1/2" shank ball and comes complete with hardware. Fits: all zero turn models.




Rubber Striping Kit

Rubber flap system lays down grass to create patterns across the landscape. (Select models and deck sizes)



Roller Bar Stripe Kit

Fits: S Series

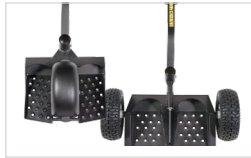

One Wheel & Two Wheel Sulky

Includes mounting hardware. Fits: FW25 and FW45.

COMPATIBILITY

	F SERIES	R SERIES	S SERIES		IS SERIES		ISX SERIES			DIESEL IS SERIES	
	F60	300R	300S	500S	IS 600	IS 700	ISX 800	ISX 2200	ISX 3300	IS 2600	IS 6200
Fender Kit	N/A	N/A	N/A	N/A	N/A	N/A	Available	Available	Available	N/A	N/A
Michelin Tweel	N/A	N/A	N/A	N/A	N/A	N/A	N/A	Available 60" Models Only	Available	N/A	N/A
Mulch Kit	Available	Available	Available	Available	Available	Available	Available	Available	Available	Available	Available
ROPS LED Light Kit	N/A	N/A	N/A	N/A	N/A	Available	Available	Available	Available	Available	N/A
LED Light Kit	Available	Available	Available	Standard	Available	Available	N/A	N/A	N/A	N/A	N/A
Metal Grass Catcher	Available	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
Service Jack	Available	N/A	N/A	Available	Available	Available	Available	Available	Available	Available	Available
Service Jack Mounting Kit	N/A	N/A	N/A	Available	Available	Available	Available	Available	Available	Available	Available
Trailer Hitch Kit	Available	Standard	Standard	Standard	Available	Available	Available	Available	Available	Available	N/A
Rubber Stripe Kit	N/A	N/A	N/A	N/A	Available	Available	Available	Available	Available	Available	Available
Roller Bar Stripe Kit	N/A	N/A	Available 48" & 52" Models Only	Available	N/A	N/A	N/A	N/A	N/A	N/A	N/A

	FW SERIES			SRS SERIES			PROCUT SERIES	
	FW15	FW25	FW45	SRS Z1	SRS Z2	SRS Z3X	ProCut S	
Mulch Kit	Available	Available	Available	N/A	N/A	Available 60" & 72" Models Only	N/A	
Fabric Grass Catcher	Available	N/A	N/A	Available	Available	Available	N/A	
Metal Grass Catcher	N/A	Available	Available 48" & 52" Models Only	Available	Available 52" Models Only	Available 52" Models Only	N/A	
Sulky	N/A	Available	Available	Available 48" Models Only	Available	Available	N/A	
Rubber Stripe Kit	N/A	Available on 48" Models Only	Available	N/A	Available	Available	N/A	
Service Jack	N/A	N/A	Available	Available	N/A	N/A	N/A	
Service Jack Mounting Kit	N/A	N/A	Available	Available	N/A	N/A	N/A	
Counter Weight Kit	N/A	Available	Available	Available	N/A	N/A	N/A	

* Not recommended for use with collection system. ** Not compatible with the collection system weight mount

“

Ferris blowers have changed the game for us. We can do ten times the leaf cleanups versus walking handheld.

– Burbacher Horst
Landscaping

”



BLOWERS

Step up your turf clean up game with the Ferris line of stand-on blowers to ensure you leave behind clean, healthy lawns. Designed to provide maximum air flow and power for effective lawn clean up and debris management, the Hurricane™ signature patented Dual Air Flow System™ splits the air-stream for deep cleaning and blowing the debris to the desired distance.



FB1000



FB2000



FB3000

MODEL ENGINE OPTIONS
5902012 Vanguard® V-Twin (18 hp*/570 cc)

MODEL ENGINE OPTIONS
5902193 Vanguard® V-Twin (23 hp*/627 cc)

MODEL ENGINE OPTIONS
5902194 Vanguard® V-Twin (35 hp*/993 cc)

	POWER RATING (HP)	DISPLACEMENT (CC)	RPM	FUEL TANK CAPACITY (GAL)	FUEL TYPE	DRIVE TRAIN TYPE	TRANSAXLES	NUMBER OF SPEEDS	MAX. TRAVEL SPEED (MPH)	FRONT TIRES	REAR TIRES	AIR FLOW	AIR SPEED
FB1000	18	570	3300	5	Regular, unleaded gasoline	Dual hydrostatic	Dual commercial Hydro-Gear® ZT-3100® transaxles with 7" cooling fans	Infinitely variable	8	11 x 4 - 5, Flat-free	20 x 8 - 8	3500 cubic feet per minute	150+ mph
FB2000	23	627	3200	10 w/ fuel gauge	Regular, unleaded gasoline	Dual hydrostatic	Dual commercial Hydro-Gear® ZT-3100® transaxles with 7" cooling fans	Infinitely variable	8	11 x 4 - 5, Flat-free	20 x 8 - 8	4500 cubic feet per minute	165+ mph
FB3000	35	993	2600	10 w/ fuel gauge	Regular, unleaded gasoline	Dual hydrostatic	Dual commercial Hydro-Gear® ZT-3100® transaxles with 7" cooling fans	Infinitely variable	9	13 x 5.5 - 6, Flat-free	22 x 11 - 10	7500 cubic feet per minute	165+ mph

	AIR FLOW	AIR SPEED	OVERALL LENGTH (IN)	OVERALL WIDTH (IN)	OVERALL HEIGHT (IN)	DRY WEIGHT (LBS)	CHARGING SYSTEM	IGNITION	STARTER	FUSE
FB1000	3500 cubic feet per minute	150+ mph	59	35.5	47	664	16 amp	Flywheel magneto	Solenoid shift	20 amp blade
FB2000	4500 cubic feet per minute	165+ mph	60	42	54	749	16 amp	Flywheel magneto	Solenoid shift	30 amp blade
FB3000	7500 cubic feet per minute	165+ mph	65	45	56	895	20 amp	Flywheel magneto	Solenoid shift	30 amp blade

FB SERIES PRODUCTIVITY VS COMPETITORS				
AVERAGE LEAF CLEARING TIME				
Units	Hours Per 1/2 Acre	Hours Per 1 Acre	Hours Per 2 Acres	Ferris Productivity
Handheld	5 hrs. 24 min.	N/A	N/A	N/A
Large Backpack	2 hrs. 45 min.	5 hrs. 29 min.	N/A	N/A
FB 1000	14 min.	29 min.	58 min.	11.3 x faster
FB 2000	10 min.	20 min.	40 min.	16.5 x faster
FB 3000	8 min.	15 min.	30 min.	22.0 x faster

2-YEAR LIMITED WARRANTY- STANDARD USE¹ + 1-YEAR LIMITED WARRANTY - RENTAL USE¹

* Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton. ¹ See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.



FS SERIES

We take care of you, so you can take care of your customers. The Ferris line of spreaders and spreader/sprayers allows you to provide a personalized treatment for each of your clients. No more one size fits all application of granular and liquid chemicals. These ride-on spreader/sprayers give you the flexibility to treat each lawn with the mixture it needs.

ROVER™ XC



PATHFINDER™



VENTURE™ X



MODEL	ENGINE OPTIONS	CAPACITY
5902199 (XC)	Vanguard® 160 (5 hp*/169 cc)	200 lbs. granular

MODEL	ENGINE OPTIONS	DECK	SPRAY
5902208	Honda® GX200-URH2 (5.8* hp/196 cc)	100 lbs. granular	12 gal.
5902209 (XC)	Honda® GX200-URH2 (5.8* hp/196 cc)	200 lbs. granular	16 gal.

MODEL	ENGINE OPTIONS	DECK	SPRAY
5902195 (XC)	Vanguard® V-Twin (18 hp*/570 cc)	200 lbs. granular	24 gal.

	POWER RATING (HP)	RPM	CLUTCH	FUEL TANK CAPACITY (GAL)	FUEL TYPE	FUEL SHUT-OFF VALVES	TRANSMISSION	GEAR SELECTIONS	SPEED	FRONT TIRES	REAR TIRES	OVERALL LENGTH (IN)	OVERALL WIDTH (IN)	OVERALL HEIGHT (IN)	WEIGHT (LBS)
ROVER	5	Full speed: 3750 rpm (no load) Idle: 1400 rpm	2:1 gear reduction wet clutch	0.82	Regular unleaded gasoline, 87 octane or higher	Located on engine	Peerless 855 Series coated for corrosion resistance	2 forward, 1 reverse, neutral	Low gear: 3.5 mph (5.6 km/hr) High gear: 5 mph (8 km/hr)	18" x 9.5 - 8, RV antifreeze added for ballast and traction	13" x 6.5 - 6	54	35.5	49	Dry: 330 Full: 550
PATHFINDER	5.8	Full speed: 3750 rpm (no load), Idle: 1400 rpm	2:1 gear reduction wet clutch	2.5	Regular unleaded gasoline, 87 octane or higher	Located on engine and below tank	Peerless 855 Series coated for corrosion resistance								
VENTURE X	18	3600 rpm	N/A	5	Regular, unleaded gasoline	N/A	Hydro-Gear® ZT-3100®	N/A	8	13" x 6.5 - 6	20" x 10 - 12	65	39	48	Dry: 627 Full: 939

	SPREADER	SPREADER CAPACITY (LBS)	SPREAD WIDTH	ELECTRIC SPREADER MOTOR	ELECTRICAL CHARGING SYSTEM	CHARGING CAPACITY (MIN / MAX)	SAFETY INTERLOCK	SRPAY PUMP	SPRAY TANK CAPACITY (GAL)	SPRAY NOZZLES	SPRAY WIDTHS	SPRAY PRESSURE	SPRAY RATE	SPRAYER PRODUCTION (SQ. FT. PER FILL)
ROVER	Spyker 220 Series	200	14 (consistent)	N/A	N/A	N/A	This machine is equipped with a neutral safety start module. To start the engine, the transmission must be in the neutral (N) position.	N/A	N/A	N/A	N/A	N/A	N/A	N/A
PATHFINDER	Spyker 120 / 220 Series	100 - 200	14' (consistent)	N/A	N/A	N/A		2 gpm mechanically driven diaphragm pump	12 - 16	Broadcast: Turbo FloodJet® TF-VS5 Trim: Turbo TeeJet® TT11004VP	3' or 11'	Variable gauge between 0-60 psi	1/4 gallon per thousand square feet	48,000 - 64,000 (1/4 gallon per 1,000 ft² at 25 psi at 5 mph)
VENTURE X	Spyker 220 Series	200	3' to 25' (variable)	Standard	Standard	20 amp / 50 amp	Parking brake must be engaged to start engine	5 gpm electric diaphragm pump	24	4 - AIXR110025	2', 4', 6' or 8'		72,000 (1/4 gallon per 1,000 ft² at 20 psi at 5 mph)	

1-YEAR LIMITED WARRANTY- STANDARD USE¹ + 90 DAY LIMITED WARRANTY - RENTAL USE¹

¹ Power rated by engine manufacturer. * Power levels are stated gross horsepower at 3600 rpm per SAE J1940 as rated by Briggs & Stratton.
¹ See operator's manual or ferrismowers.com for complete warranty details. Refer to the engine operator's manual for engine warranty details.



FERRISMOWERS.COM

 **@FERRISMOWERS**

 **@FERRISCOMMERCIALMOWERS**

 **@FERRISMOWERS**

 **MOWWITHFERRIS**

 **@FERRISCOMMERCIALMOWERS**

 **FERRIS-COMMERCIAL-MOWERS**

Briggs & Stratton: All power levels are stated gross horsepower at 3600 rpm per SAE J1940.

Kawasaki: Only Kawasaki Critical Power engines listed in this brochure have been tested in accordance with SAE J1995, verified by TÜV Rheinland Group, horsepower-rated in accordance with SAE J2723, and certified by SAE International. Torque ratings of these engines were not certified by SAE. Actual power and torque output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

Yanmar: Power rated by engine manufacturer.

Honda: Power rated by engine manufacturer.

CAT: Power is rated for 48 gross horsepower at 2800 rpm as rated by CAT.

Hydro-Gear® is a registered trademark of Hydro-Gear Limited Partnership.

Kawasaki® is a registered trademark of Kawasaki

Motors Corporation.

Yanmar™ is a trademark of Yanmar.

Honda® is a registered trademark of Honda Motor Company, Ltd.

CAT® is a registered trademark of Caterpillar Inc.

Not all models available in California.

Briggs & Stratton has a policy of continuous product improvement and reserves the right to modify its specifications at any time and without prior notice. Products may vary from images shown.

BRIGGS & STRATTON

Milwaukee, WI 53201-0702 USA

(414) 259-5333

Copyright ©2026. All rights reserved.